



Choudhary Metal Distributors

Choudhary Metals Distributors

Website : www.choudharymetals.com


Email : info@choudharymetals.com

Tel : +91-022-23802758 , 23825068

Mobile : +91-09769440266 , +91-09004446667


Forged Fittings – Technical Data

SOCKET WELD FITTING TO ANSI B-16.11

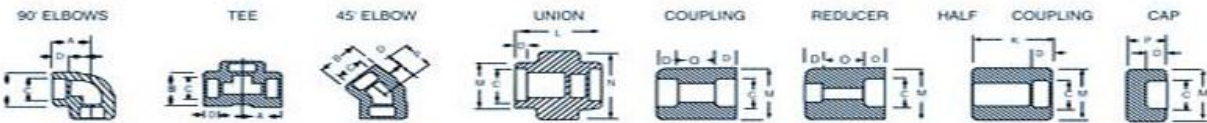

NOM BORE	PIPE O.D.	3000 LBS.										COMMON FACTORS				6000 LBS.				
		A max.	B max.	K	J	L	M	N	P	Q	C min.	D min.	O min.	O max.	A	B	M	K	N	
1/8"	10.3	22	18.5	26	16	40	17.3	32	17.5	10	10.7	10	5	8	22	22	20	25	46	
1/4"	13.7	22	22	26	18	43	21.2	32	17.5	10	14.1	10	5	8	27	25	24	25	51	
3/8"	17.2	25	25	26	19	48	25.4	36	19	10	17.6	10	3	9	27	28	28	26	60	
1/2"	21.3	27	32	30	21	51	31	43	22	10	21.7	10	6	13	31	34	34	31	72	
3/4"	26.7	34	38	36	24	57	37	50	25	13	27	13	6	13	37	42	41	35	80	
1"	33.4	37	46	40	25	64	45.2	60	27	13	33.8	13	9	17	42	50	50	40	94	
1 1/4"	42.2	42	56	40	29	70	55	70	30	13	42.6	13	9	17	47	59	58	41	100	
1 1/2"	48.3	47	62	40	30	79	61.4	78	32	13	48.7	13	9	17	53	67	66	43	122	
2"	60.3	56	75	52	37	89	75	95	38	13	61.2	16	15	23	59	84	83	55		
2 1/2"	73.02	60	92	52	48	114	91.3	125	38	16	73.8	16	14	24		102		56		
3"	89.00	76	110	52	51	127	108.8	140	44	16	89.8	16	14	24		121		58		
4"	114.50	88	137	58		150	136.9		48	19	115.5	19	14	24		152		64		

FORGED SCREWED FITTING TO ANSI B-16.11 3000/6000 LBS. THREADED TO ASA B 2.1

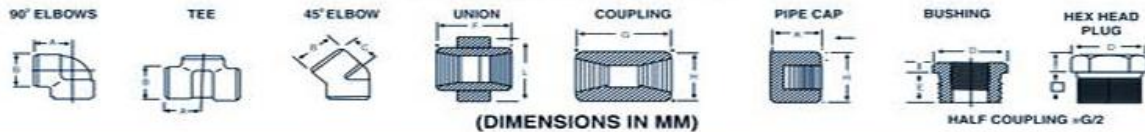

NOM BORE	PIPE O.D.	3000 LBS.										COMMON FACTORS										6000 LBS.				
		A	B	C	G	H	K	D	E	F	I	J	L	A	B	C	G	H	K							
1/8"	10.3	21	22	17	32	16	19	11	10	40	-	6	-	25	25	19	32	22	-							
1/4"	13.7	25	25	19	35	19	25	16	11	43	3	6	32	29	33	22	35	25	27							
3/8"	17.2	29	33	22	38	22	25	17.5	13	48	4	8	38	33	38	25	38	32	27							
1/2"	21.3	33	38	25	48	29	32	22	15	51	5	8	46	38	46	29	48	38	33							
3/4"	26.7	38	46	29	51	35	37	27	16	57	6	10	51	44	56	33	51	44	38							
1"	33.4	44	56	33	60	44	41	35	19	64	6	10	60	51	62	35	60	57	43							
1 1/4"	42.2	51	62	35	67	57	44	44.5	21	70	7	14	72	60	75	43	67	64	46							
1 1/2"	48.3	60	75	43	79	64	44	51	21	79	8	16	80	64	84	44	79	76	48							
2"	60.3	64	84	45	86	76	48	63.5	22	88	9	17	94	83	102	52	86	92	51							
2 1/2"	73.02	83	102	52	92	92	60	76	27	118	10	21	122	95	121	64	92	108	64							
3"	89.00	95	121	64	108	108	65	89	29	121	10	25	140	106	146	79	108	127	68							
4"	114.5	114	152	79	121	140	68	117.5	32	150	13	25	180	114	152	79	121	159	75							

DIMENSIONS AND OTHERS SPECIFICATIONS AS PER CUSTOMERS REQUIREMENTS ARE AVAILABLE ON REQUEST